
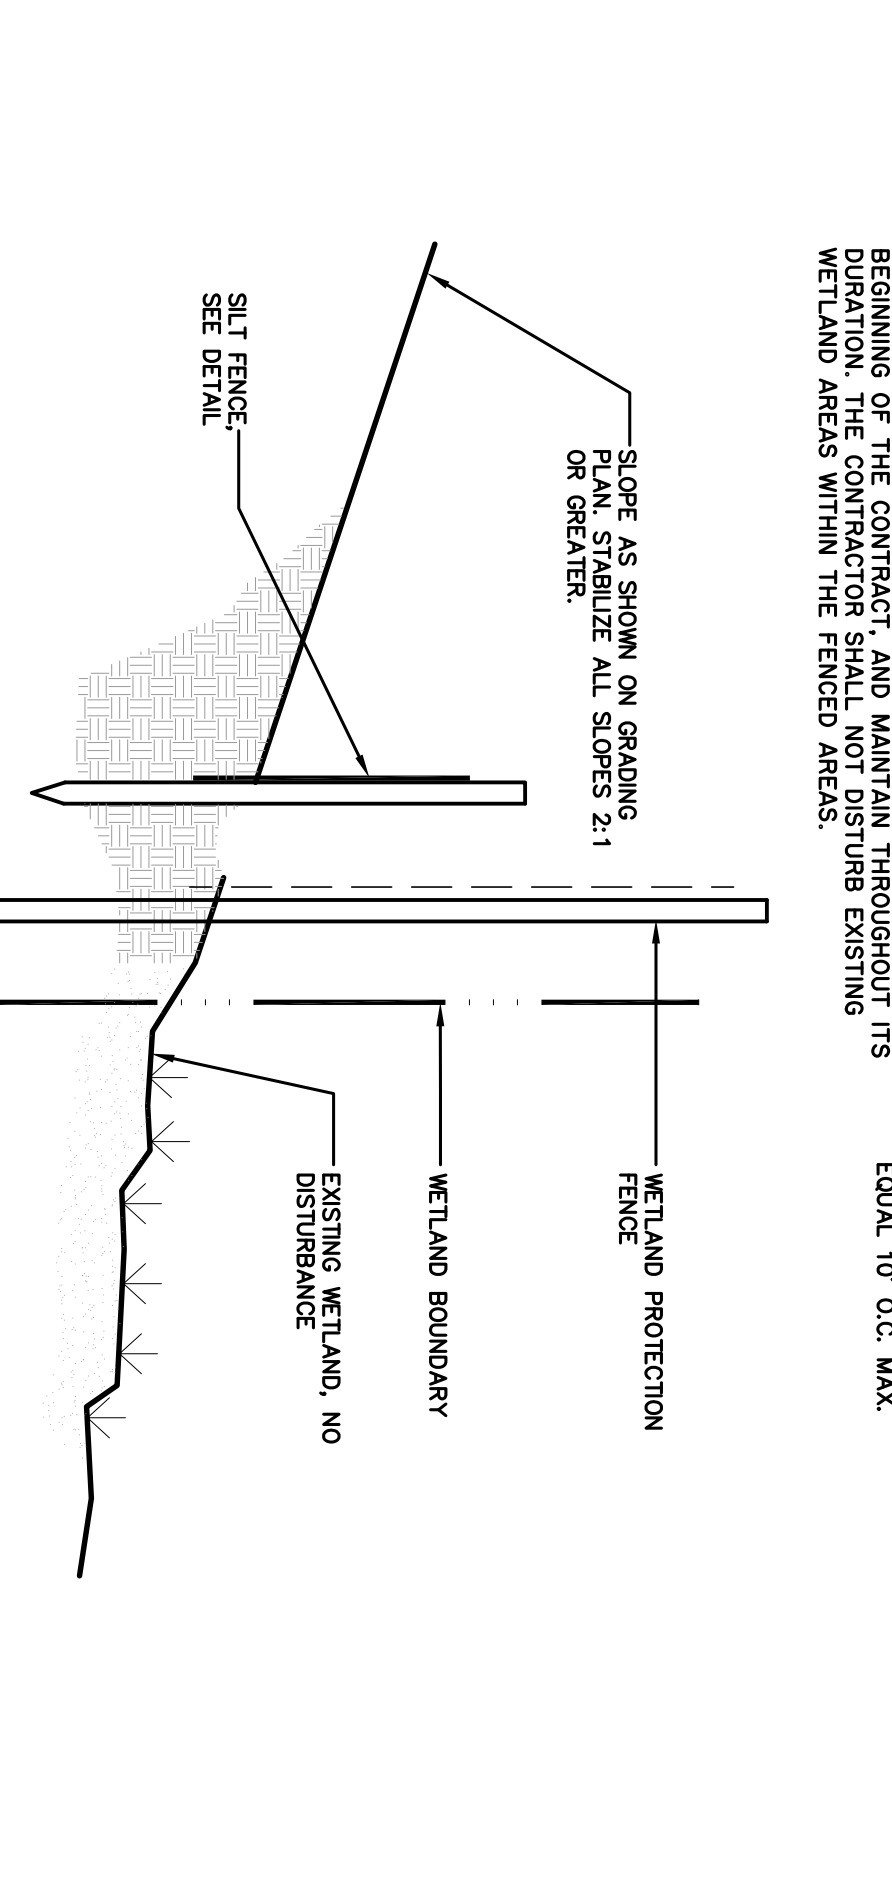



1 STABILIZED CONSTRUCTION ENTRANCE

- CONSTRUCTION SPECIFICATIONS**
1. MINIMUM STONE SIZE SHALL BE 1"-4" STONE INSTALLED OVER FILTER FABRIC TO A MINIMUM DEPTH OF 6"
 2. MINIMUM WIDTH SHALL BE 12' FOR ONE WAY TRAFFIC, 24' FOR TWO WAY TRAFFIC.
 3. ALL SURFACE WATER FLOWING OR DIVERGED TOWARD CONSTRUCTION ENTRANCES SHALL BE PREVENTED FROM ENTERING THE SITE BY CONSTRUCTION ENTRANCE BARRIERS.
 4. ENTRANCES SHALL BE MAINTAINED IN A CONDITION WHICH WILL PREVENT TRACKING OR SPREADING OF SEDIMENT FROM THE SITE TO ADJACENT AREAS.
 5. ALL APPROVED SECTIONS OF TRUCKED INTO PUBLIC RIGHTS-OF-WAY SHALL BE REPAIRED IMMEDIATELY.
 6. INSPECT AND MAINTAIN AS NEEDED TO CONFORM TO SPECIFICATIONS AND STOWAWAYS.


2 SILT FENCE

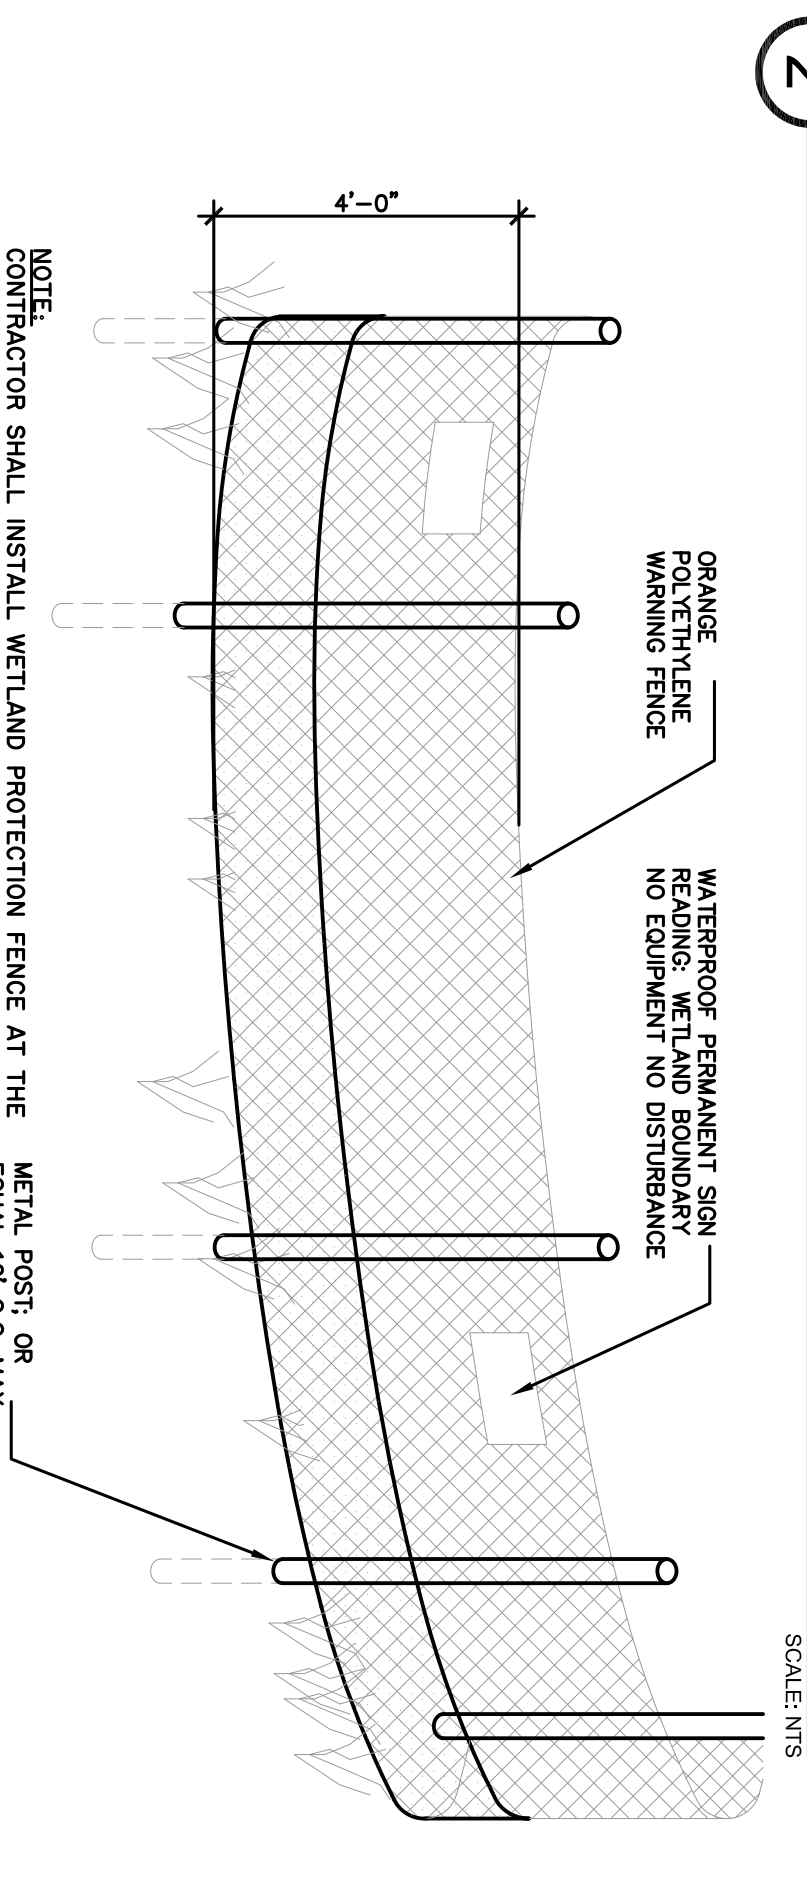


3 WETLAND PROTECTION FENCE

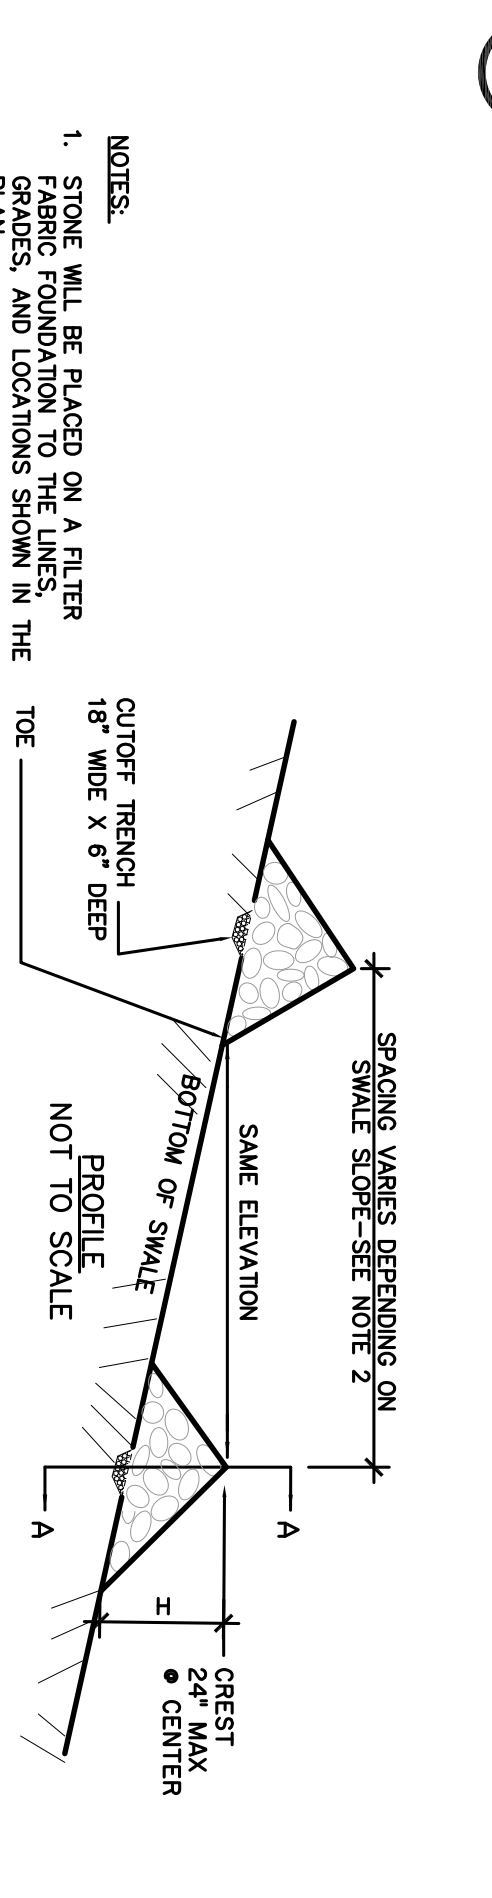


4 STONE CHECKDAM

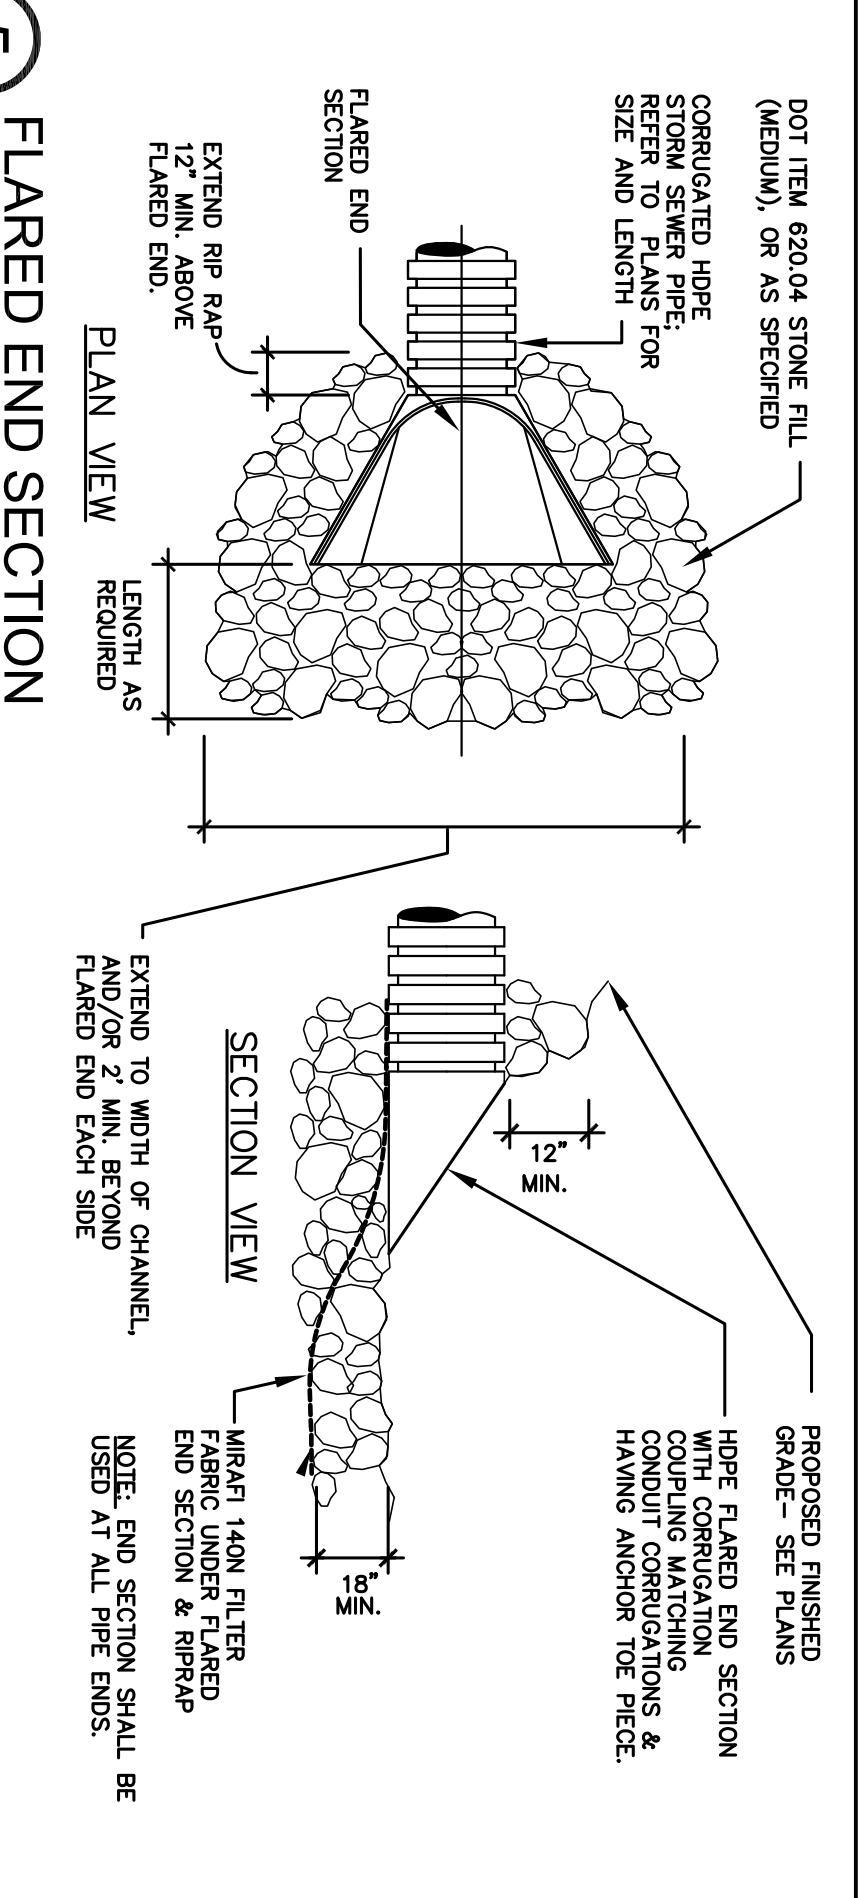


5 FLARED END SECTION

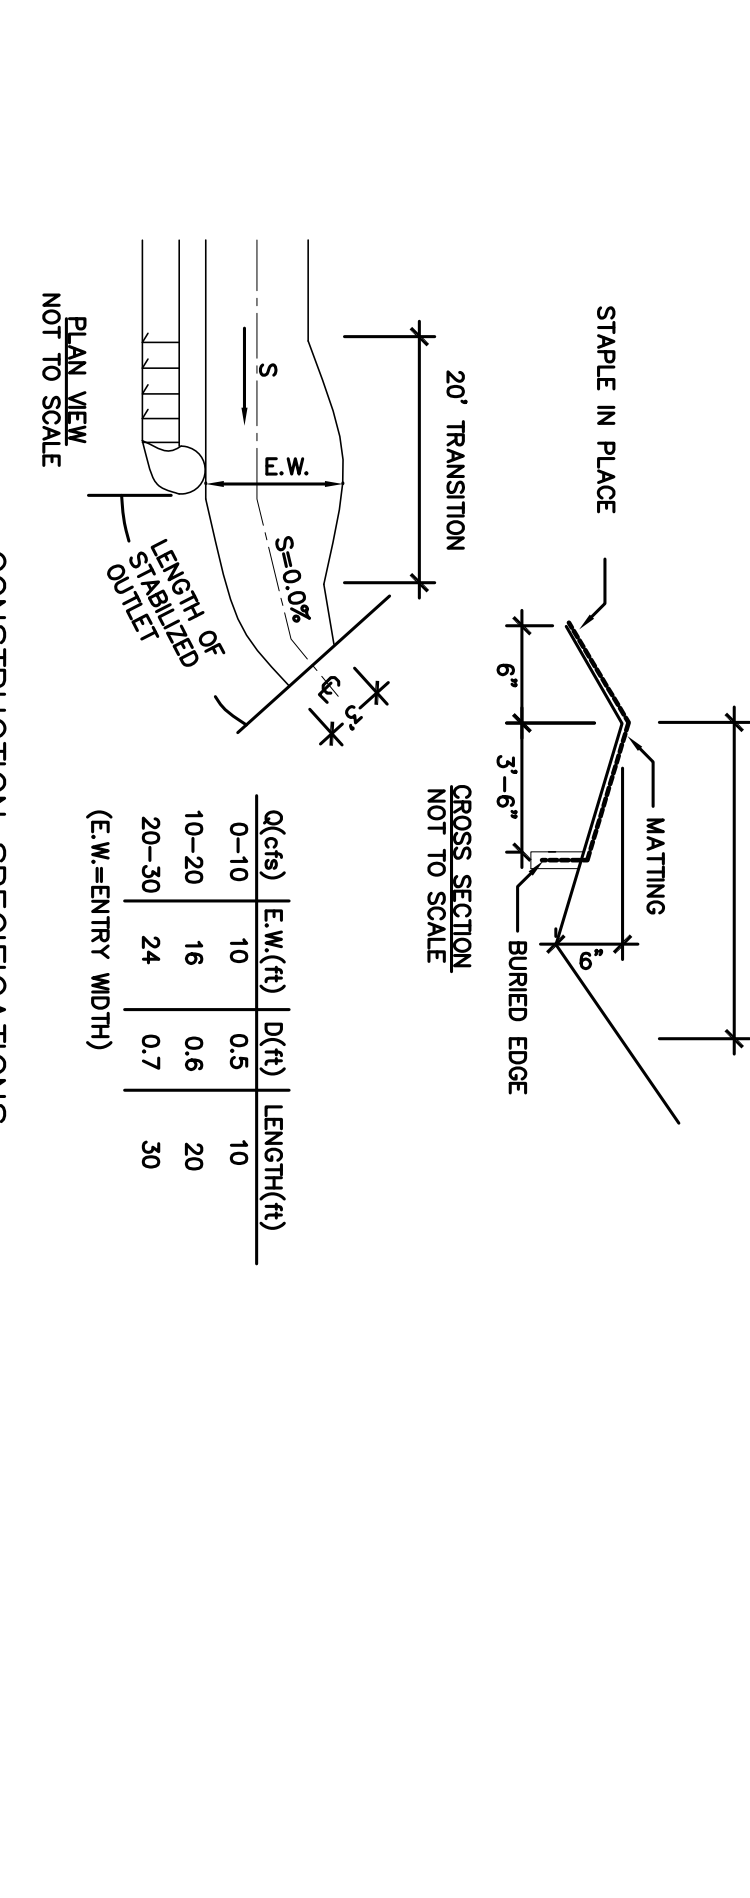


6 LEVEL SPREADER

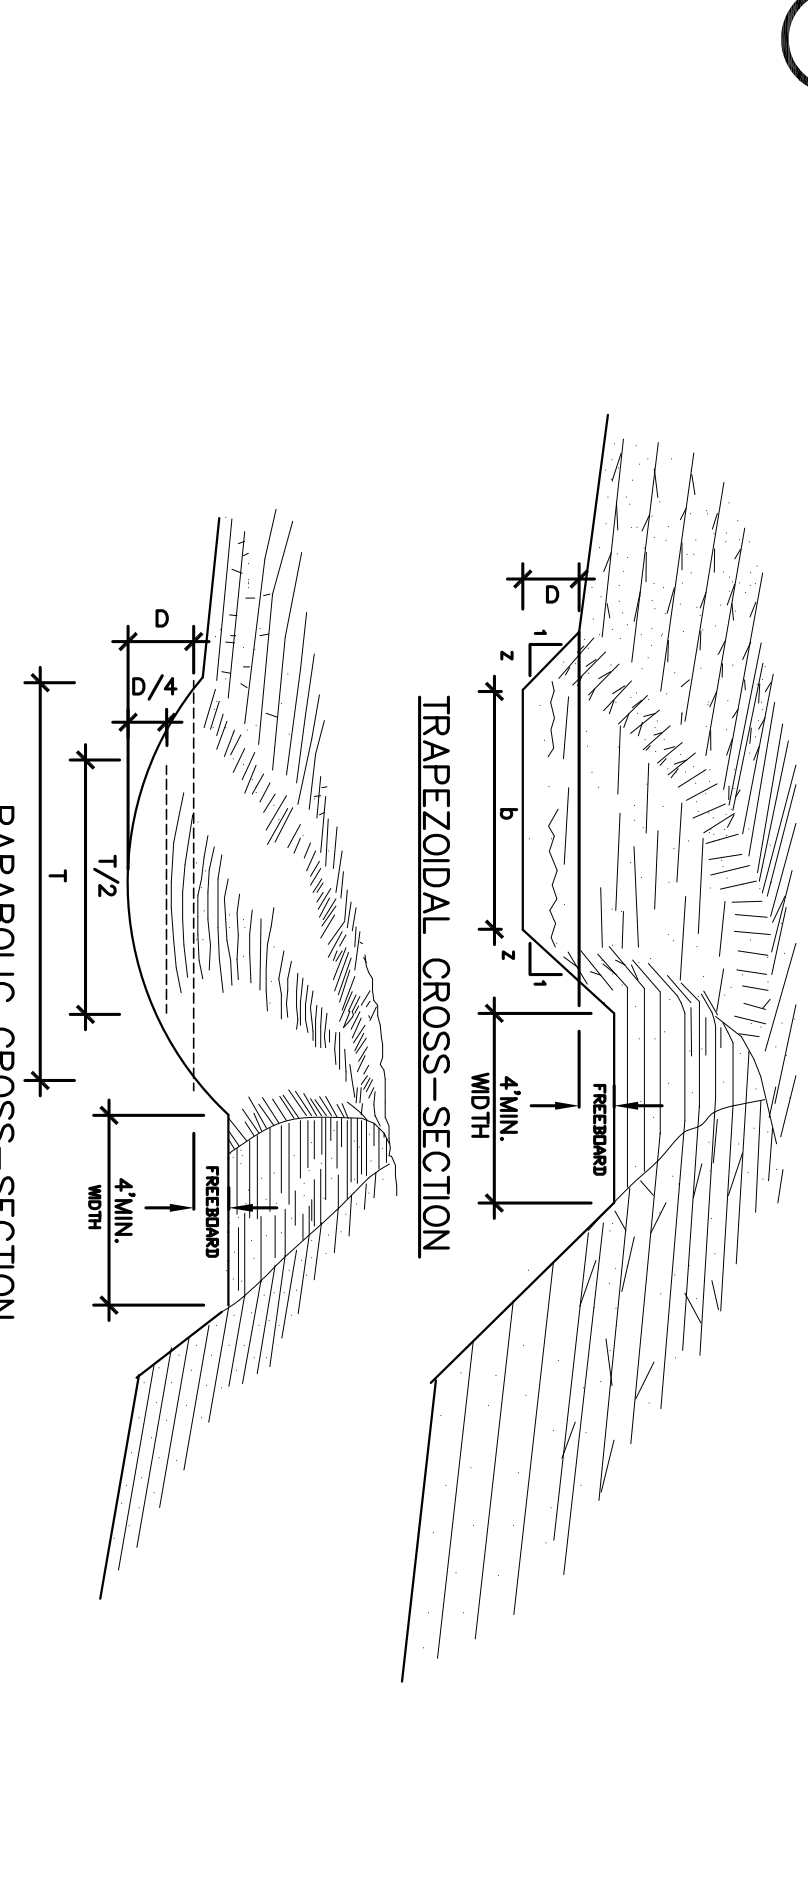


7 DIVERSION SWALE

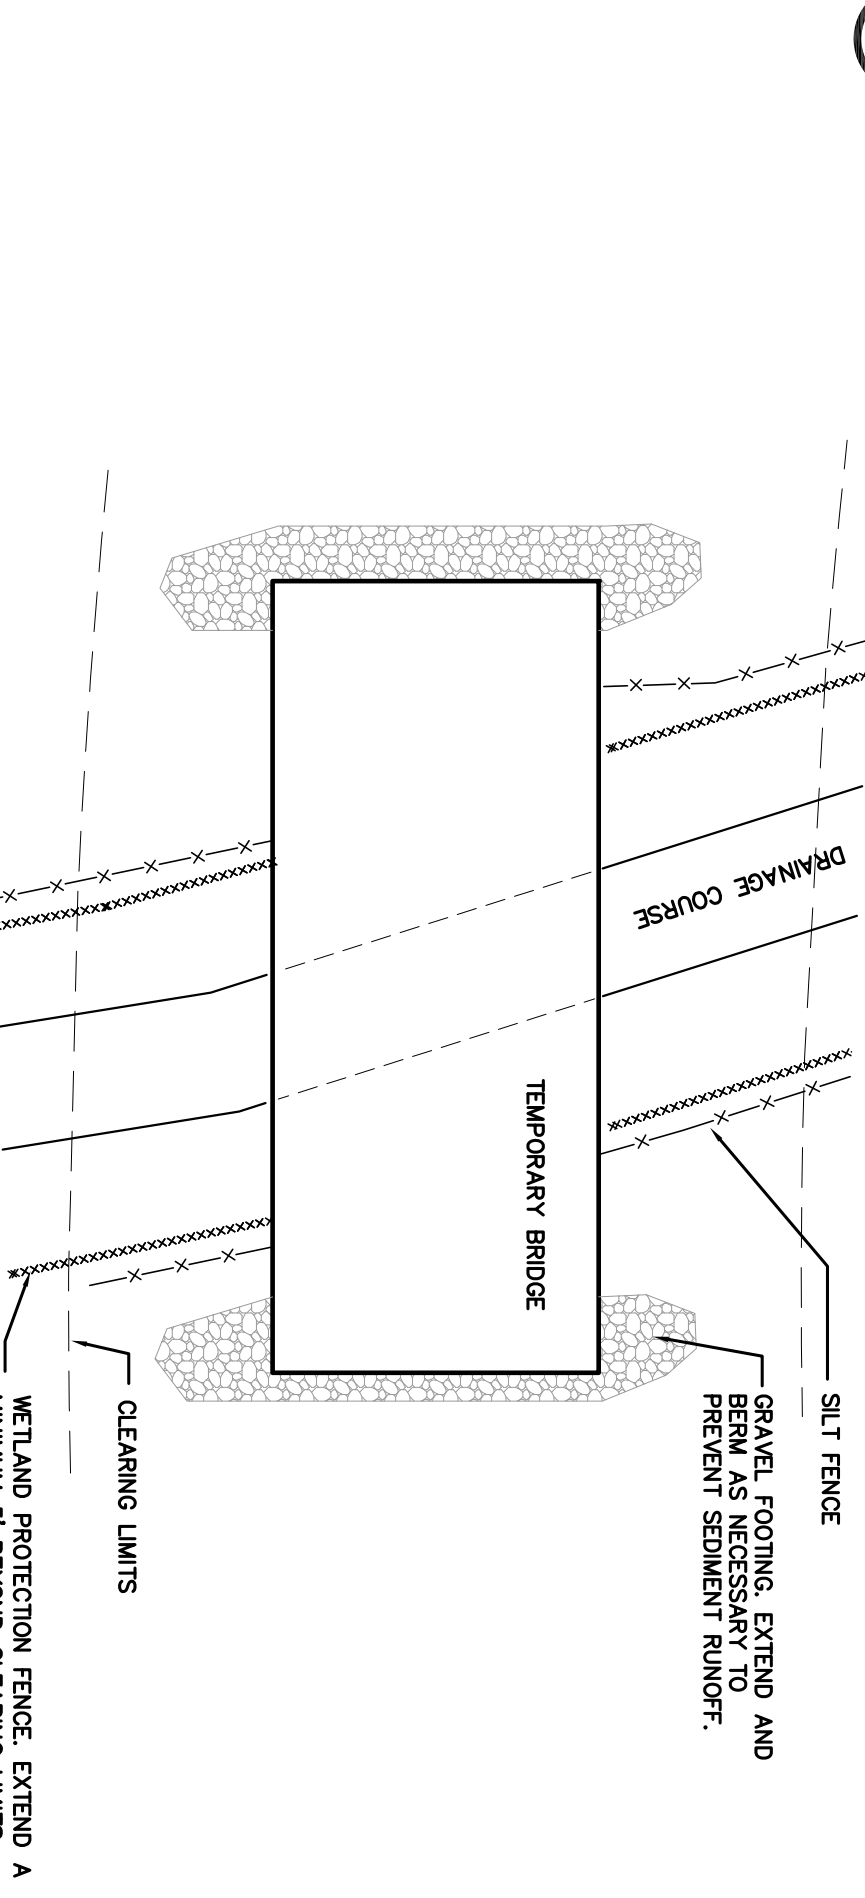


8 TEMPORARY STREAM CROSSING

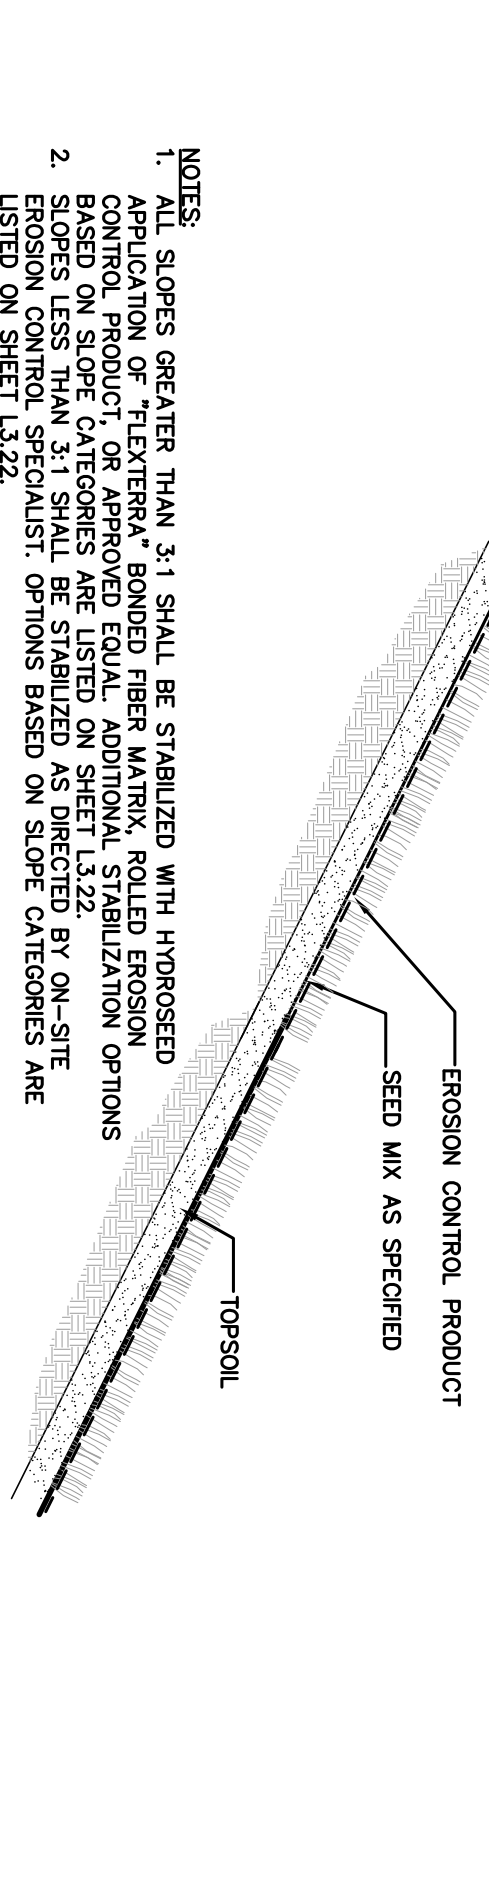


9 SLOPE STABILIZATION

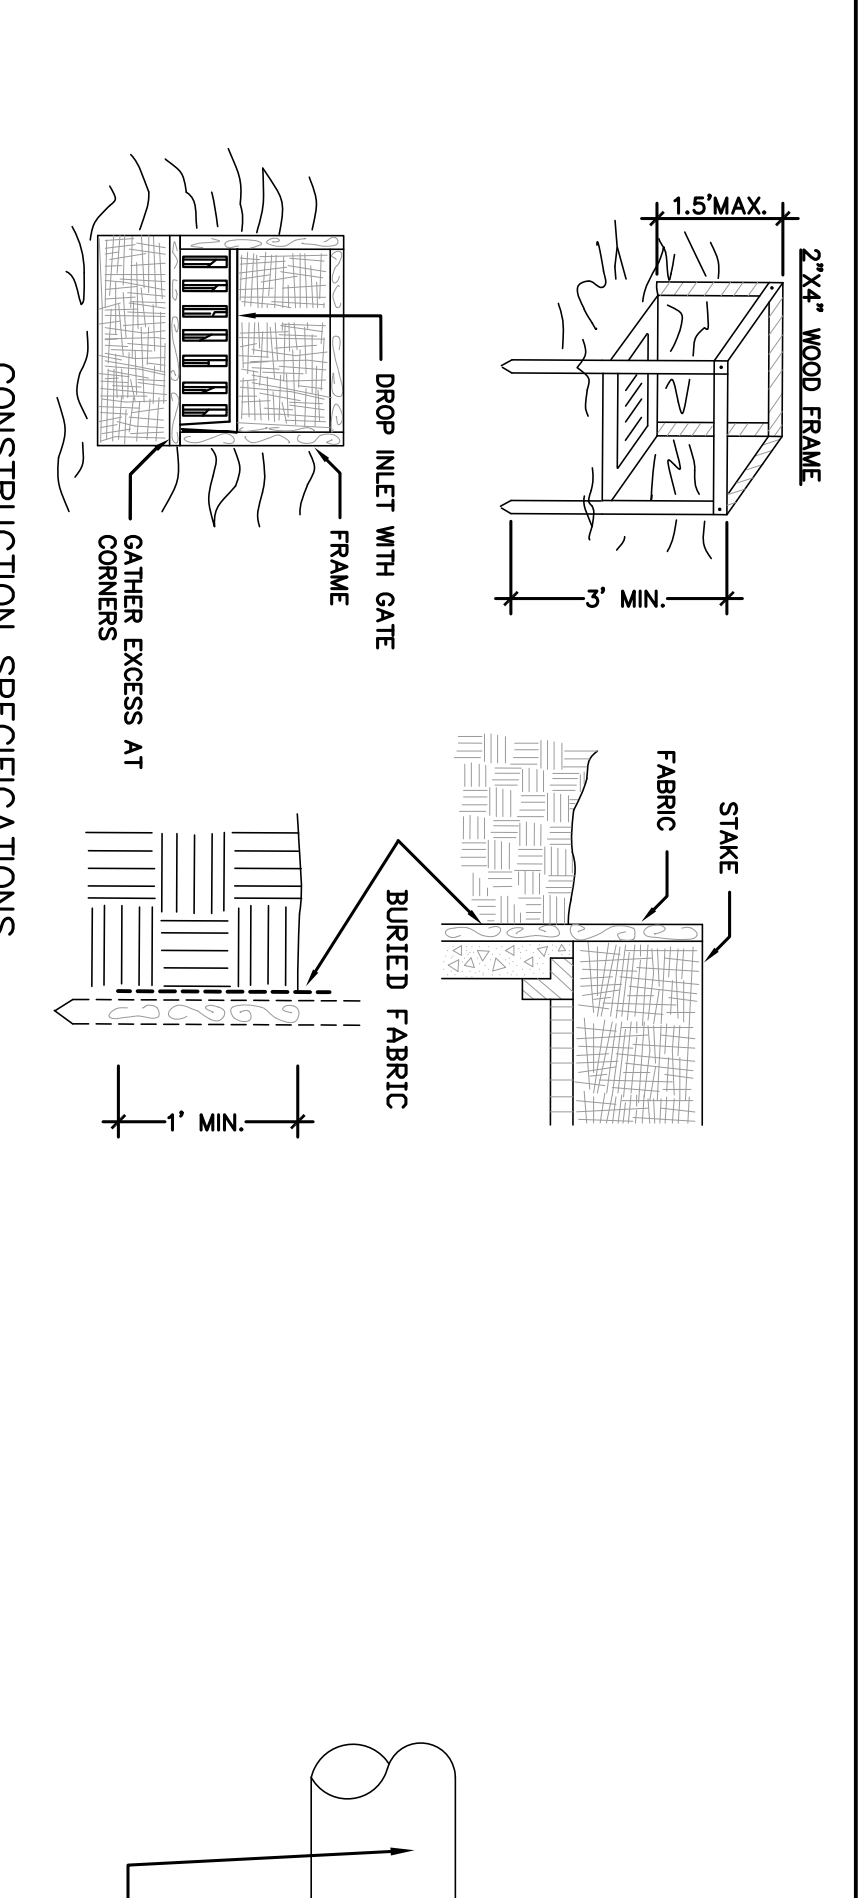


10 INLET PROTECTION AT CATCH BASIN

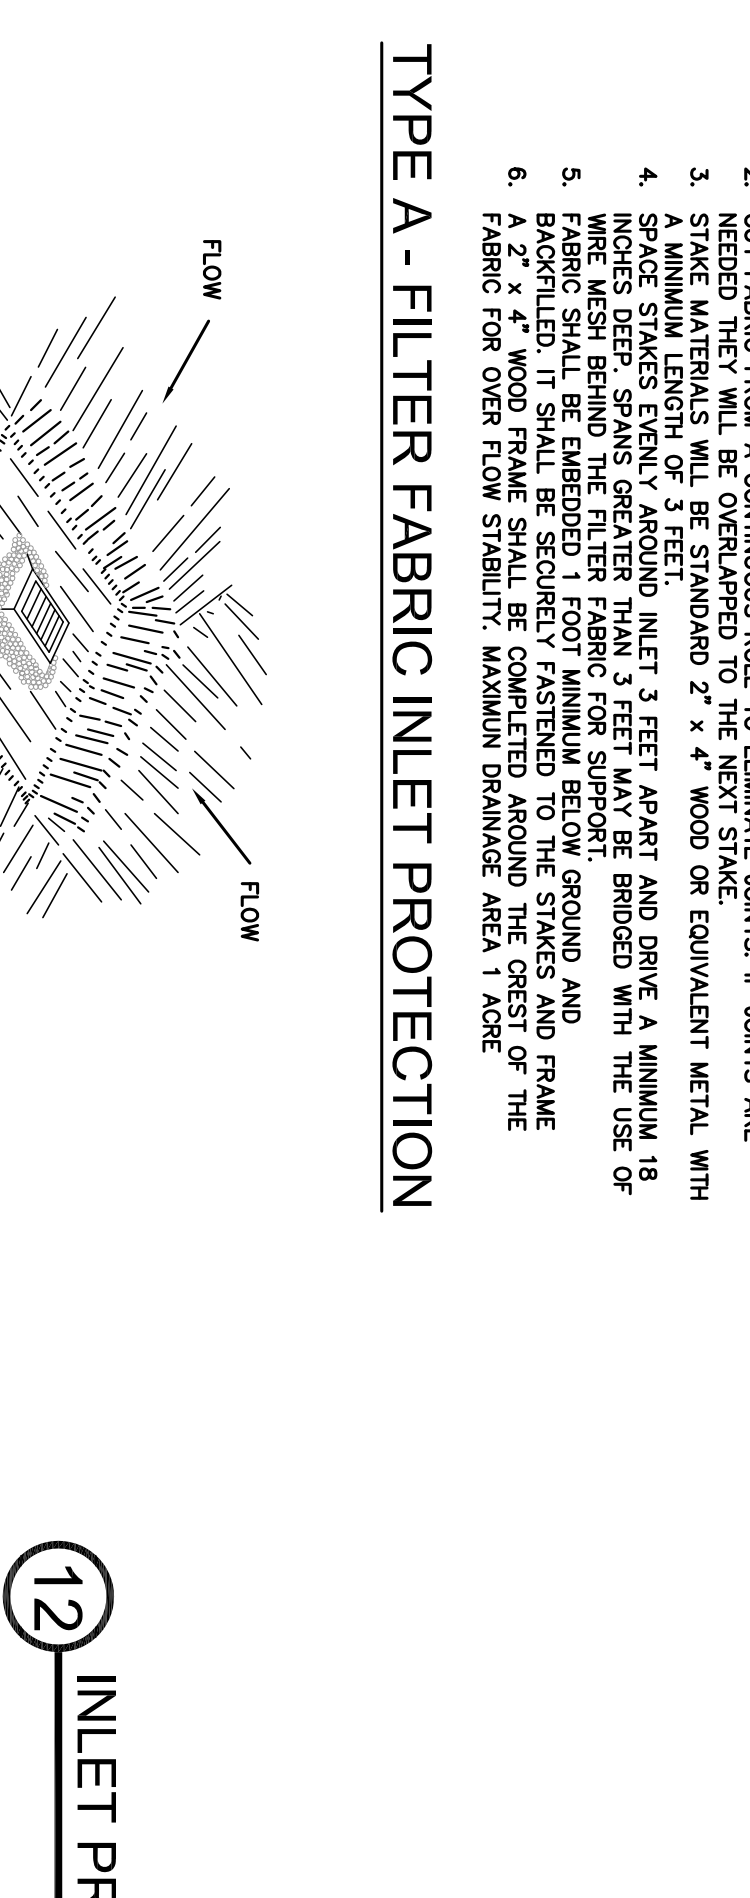


11 RIP RAP OUTLET PROTECTION

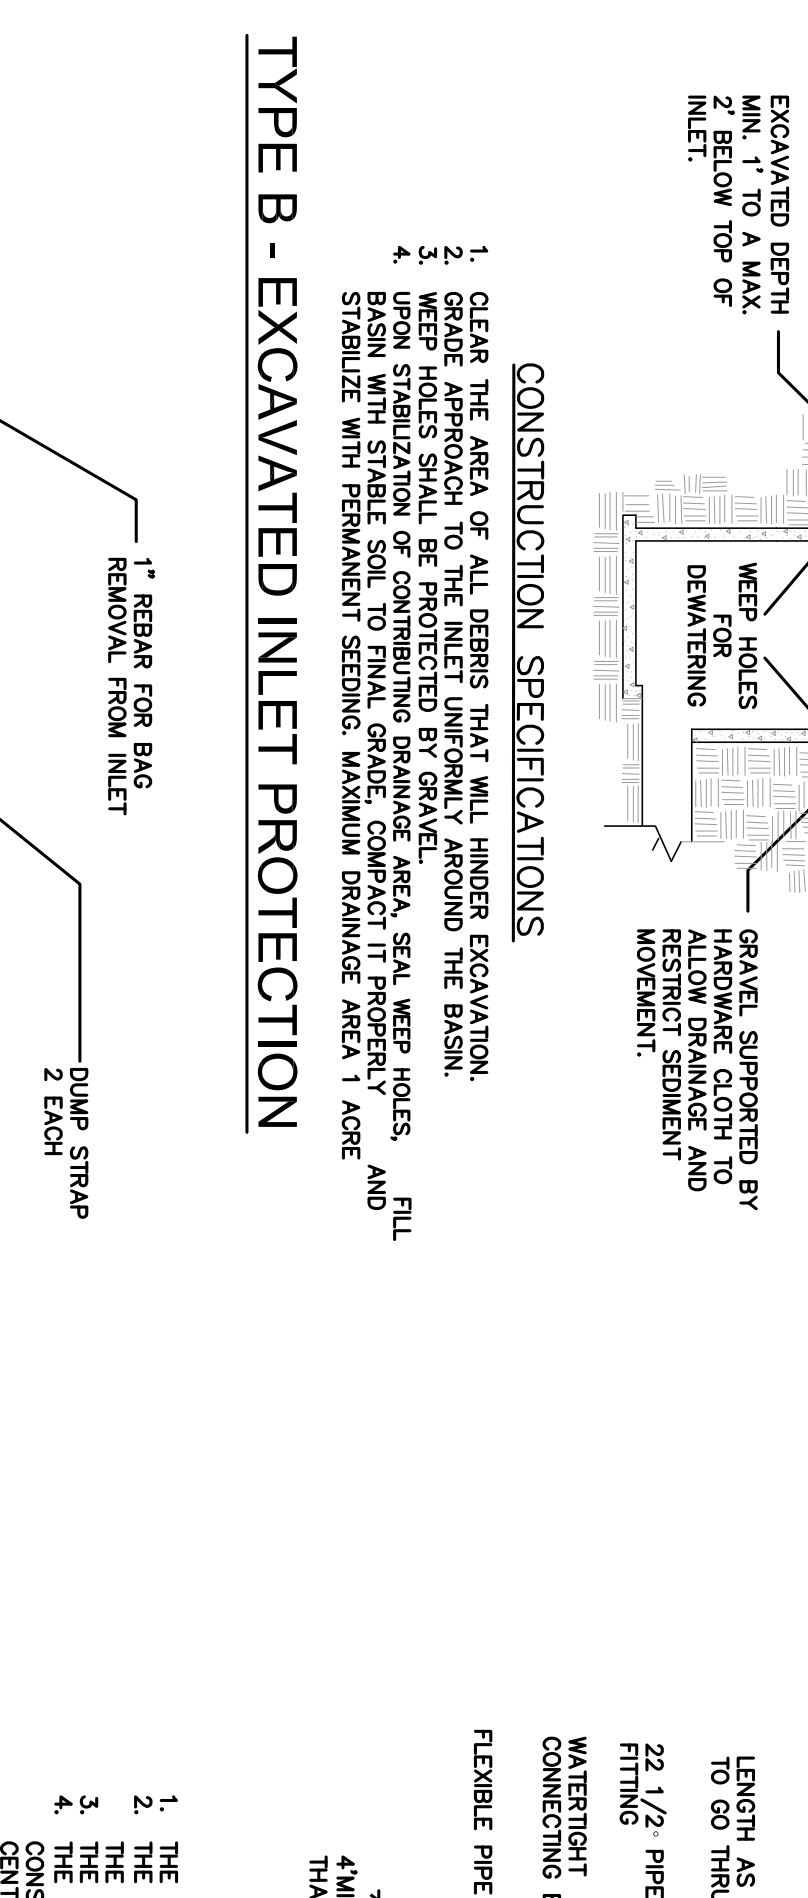

12 INLET PROTECTION AT CULVERT

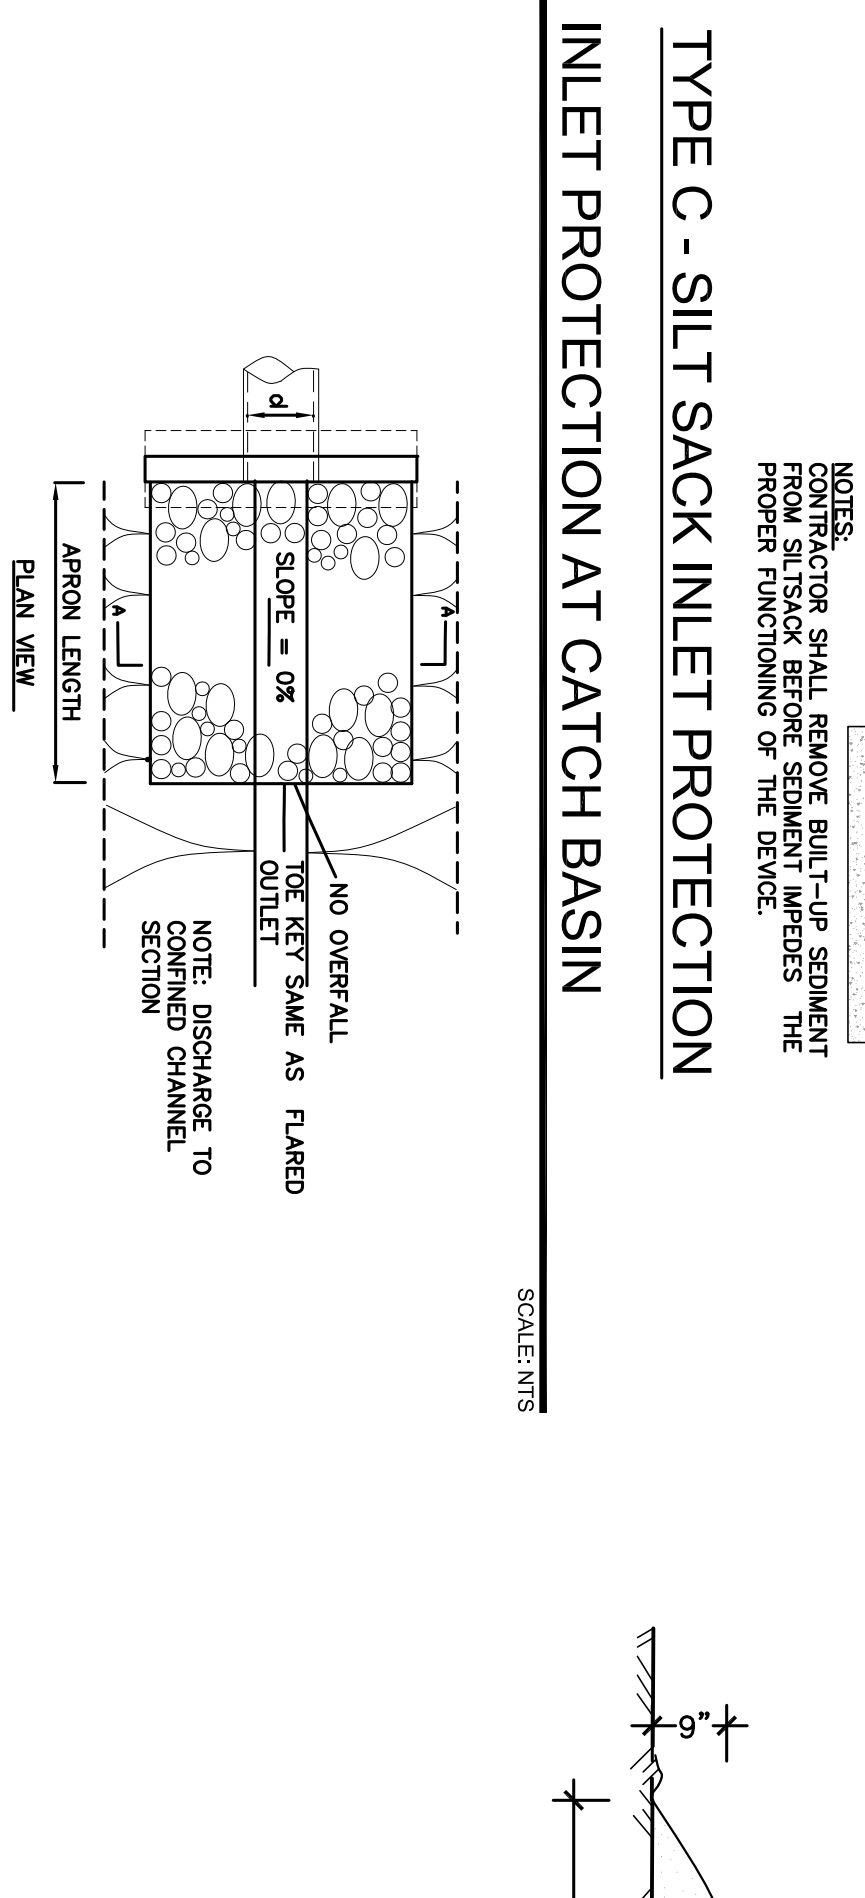

13 PIPE SLOPE DRAIN

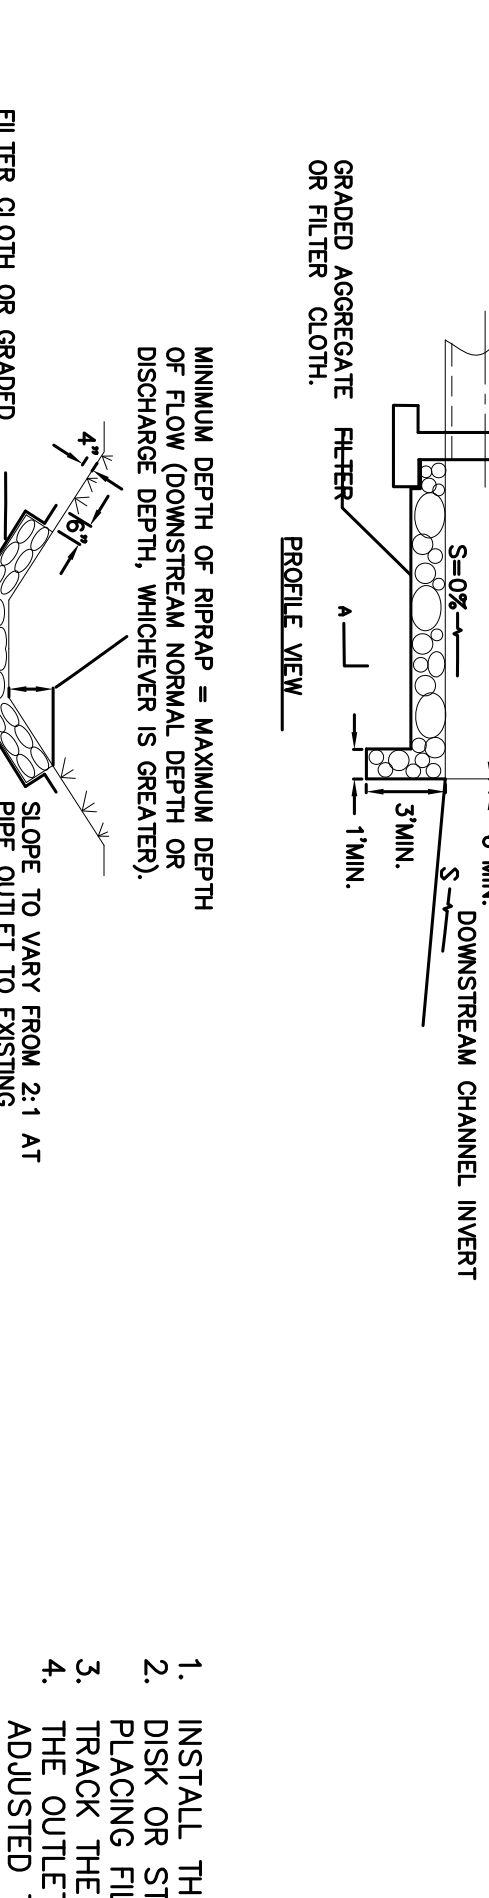

14 WATER BAR