

ACTIVE WORK AREA

WORK AREA (1B.1)



CONSTRUCTION STAGING BY SECTION

1. IN WORK AREA 1B.1, FOLLOW STEPS 1-10.
2. EXCESS EROSION CONTROL MEASURES HAVE BEEN INSTALLED. EARTHWORK MAY BE PROCEEDED.
3. EXCESS MATERIAL WILL BE TEMPORARILY STOCKPILED AS NOTED ON PLANS.
4. EXCESS MATERIAL STOCKPILES SHALL BE STABILIZED (STEPS 18-22). CONSTRUCTION MAY BEGIN IN WORK AREA 1B.2.
5. TIMING OF UTILITY AND STORMWATER STRUCTURES IS AT THE CONTRACTOR'S DISCRETION.

TYPICAL EROSION AND SEDIMENT CONTROL SEQUENCING

1. PRE-CONSTRUCTION AND SITE PREPARATION
2. DEFINE CONSTRUCTION SCHEDULE, REVIEW STORMWATER POLLUTION PREVENTION PLAN, AND OBTAIN NECESSARY PERMITS
3. STAKEOUT ROAD CENTERLINE, CLEARING LIMITS, WETLANDS, AND STREAMS
4. INSTALL STEEL PROTECTION AND WEED PROTECTION BARRIERS
5. CUT AND REMOVE EXISTING TREES AND LOGS, DO NOT GRUB STUMPS
6. TEMPORARILY BARRIER AND DAMAGE CONTROL
7. CONSTRUCTION
8. INSTALL PERIMETER EROSION CONTROL INCLUDING SILT FENCE, BIO-LOGS, EARTH LOGS, AND WATER BARRIERS AS SPECIFIED BY ON-SITE EROSION AND SEDIMENT CONTROL PLAN
9. INSTALL WATER BARRIERS IN LOCATIONS AS SPECIFIED BY ON-SITE EROSION AND SEDIMENT CONTROL PLAN
10. INSTALL TEMPORARY DIVERSIONS INCLUDING INLET AND OUTLET PROTECTION, AND PERMANENT DIVERSIONS WHERE APPROPRIATE
11. EARTHWORK AND SITE CONSTRUCTION
12. TEMPORARILY DIVERT EROSION LOCATIONS, EXCAVATE SEDIMENT BASINS AND STABILIZE SEDIMENT BASINS
13. INSTALL TEMPORARY DIVERSION SWALES
14. INSTALL PERMANENT DIVERSION SWALES
15. GRUB REMAINING STUMPS, BEGIN ROOT GRUBBING WITH INLET PROTECTION, AND PERMANENT DRAINAGE STRUCTURES WITH INLET AND OUTLET PROTECTION
16. BUILD ROWWAYS AND STABILIZE
17. PLACE ROAD SURFACING, STABILIZE, AND BUILD PERMANENT STORMWATER STRUCTURES
18. TEMPORARILY STABILIZE WORK AREA
19. REPAIR AND PATCH ALL EROSION AREAS TO REMAIN UNDISTURBED FOR MORE THAN 14 DAYS
20. REPAIR EROSION CONTROL, PROTECT OR IMPROVE A WATERWAY OR WOOD CRIB WITH LOGGING AGENT, TO ALL SLOPES 3:1 OR GREATER
21. INSTALL/REPAIR ALL INLET AND OUTLET PROTECTION, PERMANENT SWALES, AND TEMPORARY DIVERSIONS
22. STABILIZATION STEPS AS TEMPORARILY STABILIZED MATS, PER RAP, AND CHECKDAMS
23. REPAIR/RE-SEED ALL BARE SPOTS
24. CONSTRUCT PERMANENT STORMWATER BASINS, OR CONVERT SEDIMENT BASINS TO PERMANENT STORMWATER BASINS
25. INSTALL 500 GPM ON ALL AREAS AS SPECIFIED
26. REPAIR/RE-SEED ALL BARE SPOTS
27. REPAIR/RE-SEED ALL BARE SPOTS
28. REMOVE TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES AS APPROVED

LEGEND

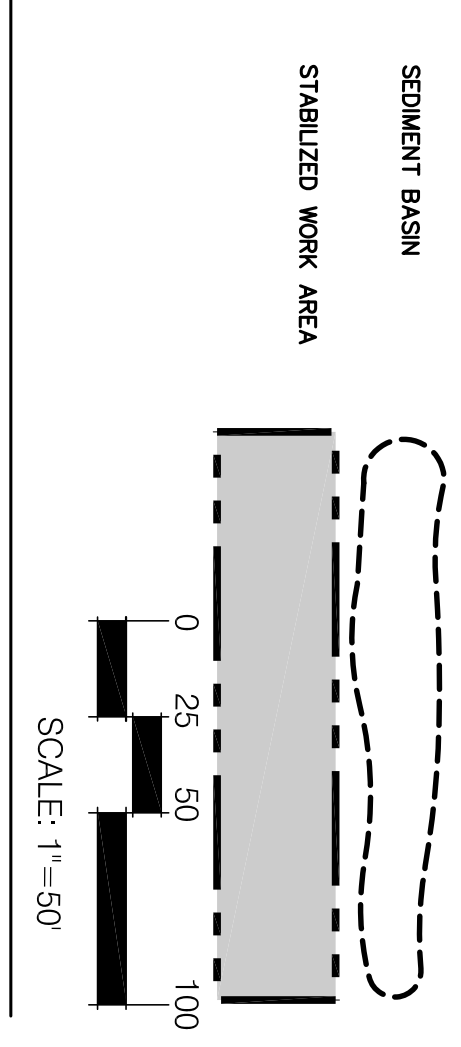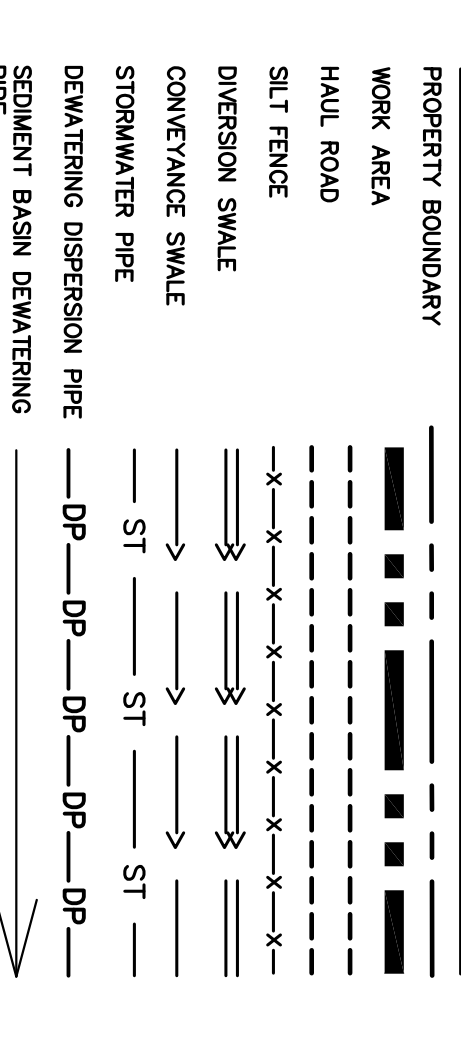

the LA Group
 Landscape Architecture
 and Engineering, PC
 40 Long Alley
 Stratford Springs
 New York, 12548
 F 518.697.2480
 www.thelagroup.com

© the LA Group 2010
 Design: MTL/MTS
 Drawn: MTL/MTS
 Checked: KJF/SLA

FOR REGULATORY APPROVALS ONLY

PREPARED FOR:
 Crossroads Ventures, L.L.C.
 PO Box 267
 Mt. Tremper, NY 12457

The Modified Belleayre Resort at Catskill Park
 Wildacres Resort & The Highmount Spa Resort
 Town of Shandaken & Town of Middletown, New York
 Title:
 Sediment and Erosion Control Plan- Front 9 Village

Key Plan
 NORTH
 Revisions:
 Project: 07074
 Date: 03/30/2011
 Drawing: L-3.10